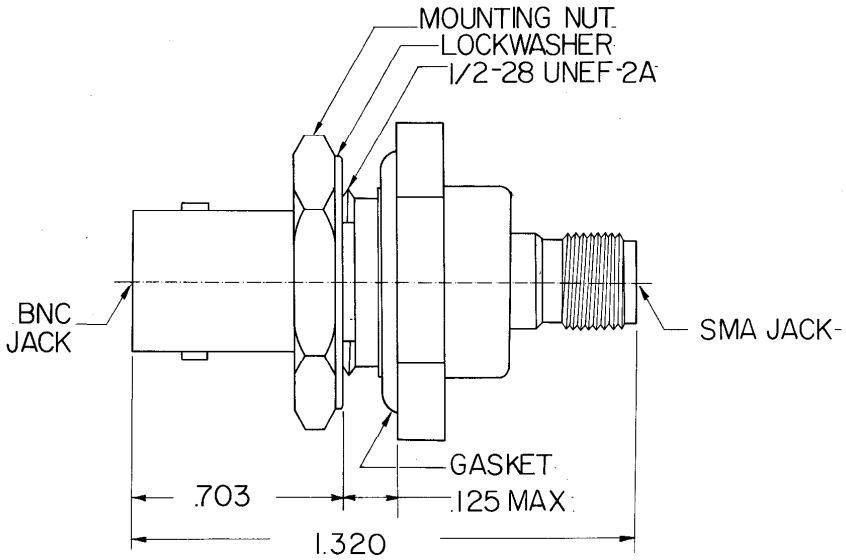

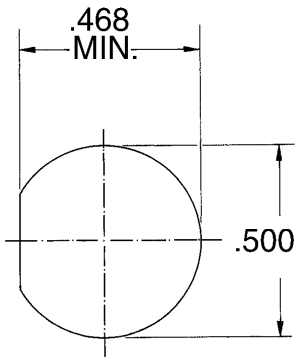

PANEL CUTOUT

5. VSWR NOT TO EXCEED 1.40:1 FROM DC TO 2 GHz
   & 1.50:1 FROM 2 GHz TO 8 GHz
4. ADAPTOR TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-39012
3. FINISH:
   BODY AND MOUNTING NUT : NICKLE PER QQ-N-290
   CONTACT: GOLD PER MIL-G-45204: TYPE II,
   CLASS 2, OVER COPPER PER MIL-C-14550, CLASS 4
2. MATERIAL:
   BODY AND MOUNTING NUT: BRASS PER QQ-B-626
   CONTACT: BERYL. COPPER PER QQ-C-530
   INSULATOR: TEFLON PER MIL-P-19468A
1. MATING DIMS IN ACCORDANCE WITH MIL-STD-348

NOTES :

PART NO.	1-9	10-24	25-49	50-99	100+
7104	$29.75	$28.20	$26.75	$25.80	$24.50

NOTICE
This drawing embodies a CONFIDENTIAL proprietary design originated by United Microwave Products, Inc., and all design, manufacturing, reproduction, use and sale rights regarding the same are expressly reserved. It is submitted under a confidential relationship for a specified purpose and the recipient agrees by accepting this drawing not to supply or disclose any information regarding it to any unauthorized person or to incorporate in other projects any special feature peculiar to this design. All patent rights hereto are expressly reserved by United Microwave Products Inc.

WEIGHT	SCALE
N/A	NONE

TOLERANCES AND NOTES EXCEPT AS NOTED
DIMENSIONS ARE IN INCHES
LINEAR .XX ± .015 ANGULAR ± 1/2 ° FRACTION ± 1/32
XXX ± .005
1. MACHINE FINISH 63 RMS
2 . BREAK ALL SHARP EDGES .002
3. ALL MACHINED FILLLETS
4. ALL MACHINED SURFACESS SQUARE TO RESPETIVE AXIS WITHIN .003 PER INCH.
5. MACHINED DIAMETERS TO BE . CONCENTRIC WITHIN .002 - .003 T.I.R.
6. DIMENSIONS TO BE MET BEFORE PLATING.
7. CHAMPER ALL THDS .45 DEGREES
8. THREADS PER H-2B
9. REMOVE FRAYED EDGES ON TEFLON.
10. REMOVE ALL BURRS.

MATERIAL	SIZE	SPECIFICATION	PROCUREMENT

APPR.	
ENG.	
CHK.	
DR.	

UNITED MICROWAVE PRODUCTS Inc.

BNC JACK TO SMA JACK BULKHEAD MOUNT WITH GASKET

7104